



# ADA Window Signs

## Letrix USA Products



- ADA Directional Signs
- ADA Wall Signs
- ADA Window Signs
- Frames for Signs
- Engraved Wall Signs
- Engraved Desk Signs
- Badges
- Cubicle Signs
- Building Letters
- Commemorative Plaques
- Traffic, Parking Signs
- Post and Panel Signs
- ChannelITEX
- LCD/LED Displays
- Digitally Printed Signs

### Phone

1-888-4LETRIX

### E-mail

jgenduso@letrixusa.com

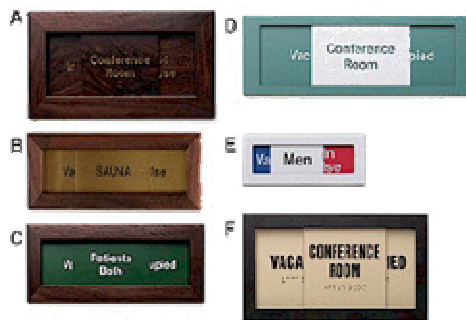

## Product Overview

Our signage package provides specialty insert solutions for temporary or customized displaying of documents, photographs, messages and names.

Window Sign displays any letter-size printed matter, including photographs. The clear, low glare, acrylic face insert can be attached to the sign.

## Standard Sizes

Sign windows are available in 1" increments from 4"x8" to 10"x15".

## Accessories

- Holes
- 3M Tape
- Combination Mounting

## Colors

Over 600 Pantone colors to provide designers with greater flexibility.

## Options

Order with or without frames.

Multi-color logos are available for dramatic architectural look and feel. Logos can be included on sign sizes from 3"x8" to 10"x15".

Color Match sign colors are available, and special paper colors and/or patterns can be specified. Window Inserts can be used for computer-generated signs, printed on die-cut paper inserts, or reverse-cut vinyl copy applied to back surface of Lexan® lens.

## ADA Window Signs

### General Signage Specification

- 1.1 SIGN MATERIALS
  - A. Face: Photopolymer Face, in matte (non-glare) finish.
  - B. Backing Plate: Acrylic.
- 1.2 FABRICATION OPTIONS
  - A. Tactile Graphics and Text:
    1. Fabrication process: Provide tactile copy [and grade 2 Braille] raised 1/32 inch minimum from plaque first surface by manufacturer's photopolymer bonded process. Signface of single material, tactile characters and Braille integral to photopolymer. Adhesive-fixed characters are not acceptable.
    2. Provide lettering and graphics precisely formed, uniformly opaque to comply with relevant ADA regulations and requirements indicated for size, style, spacing, content, position, and colors. Tactile characters to be raised min. 1/32" from surface. Computerized translation of sign copy to be responsibility of the manufacturer.
  - B. Mounting Panel Options:
    1. Size:
      - a) [Same size.]
      - b) [Oversized.]
    2. Thickness:
      - a) [.125 inch thick matte finished acrylic.]
      - b) [.080 inch thick matte finished acrylic.]
      - c) [.125 inch thick clear acrylic.]
      - d) [.080 inch thick clear acrylic.]
  - C. Background Appearance Options:
    1. [Solid color[s]: Select from manufacturer's standard range.]
    2. [Custom colors as selected.]
    3. [Subsurface custom graphics.]
  - D. Tactile Lettering and Graphics Color Options: [Select from manufacturer's standard colors.]
  - E. Overall panel size: [Specify height and width of sign up to 10 x 15 inches.]
  - F. Shape: [Standard] [Custom - specify]
  - G. Letter style[s], color[s], letter size[s] and layout position: [Specify from manufacturer's]
- 1.3 QUALITY ASSURANCE
  - A. Our quality assurance requirements are consistent with the size and scope of any project.
  - B. Regulatory Requirements: Products shall meet requirements of the Americans With Disabilities Act Accessibility Guidelines (ADAAG) and local amendments and modifications.
- 1.4 INSTALLATION
  - A. Install product in accordance with supplier's instructions.
  - B. Install product in locations indicated using mounting methods recommended by sign manufacturer and free from distortion, warp, or defect adversely affecting appearance.
  - C. Install product level, plumb, and at heights indicated.
  - D. Install product at heights to conform to Americans with Disabilities Act Accessibility Guidelines (ADAAG) and applicable local amendments and regulations.
  - E. Install signs within the following tolerances and in accordance with manufacturer's recommendations:
    1. Interior Signs: Within 1/4 inch vertically and horizontally of intended location.
- 1.5 WARRANTY
  - A. Warranty Period: One year from product ship date.